


BSPT THREADED EQUAL TEE

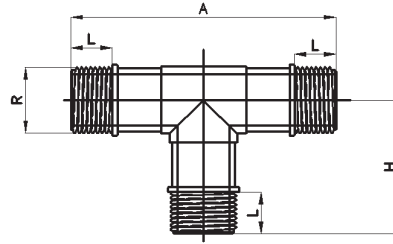

	Size	Code	g	SP	A	L	H
1	3/4" x 3/4" x 3/4"	MT075X075X075	21	120	84	17	42
2	1" x 1" x 1"	MT100X100X100	70	90	134	21	68

Note : SP - Standard Packing Quality, g - Individual fitting weight in gms

Kimplas Threaded Equal Tees, manufactured in PP (Poly-Propylene) are Standard PN 10 rated. They are used on threaded pipes and fittings while taking for branch connections. They are most suitable to connect threaded valves and threaded compression fittings on PE Pipes for drip and sprinkler irrigation piping.

Common Applications:

- ✓ Branch connections on Threaded pipes.
- ✓ Branch connections on PE pipes with threaded fittings.
- ✓ Connections of threaded PVC Ball valves in mini impact sprinkler systems.
- ✓ Connections of threaded compression fittings

Installation :

Joint preparation must be done as specified in the installation instructions. Always use sealant tape (Plumber's tape or Teflon tape) on male threads of the threaded tee, before using with threaded fittings. Tighten the threads with hands only. Tighten gently, until the threads are screwed on the threaded fitting. Do not over-tighten. Never use tools such as wrench or plier etc. Complete Installation Manual may be downloaded.

Advantages :

- Body made of non-corrosive material - PP Plastic
- For field use, exposed to sun, the material is duly stabilized with carbon black against UV radiation
- Compact but sturdy Moulded body
- Threads conform to IS: 554 (BSPT), ISO: 7/1
- Available in two most popular thread sizes of 3/4" and 1"
- Suitable to use with all types of threaded pipes and fittings